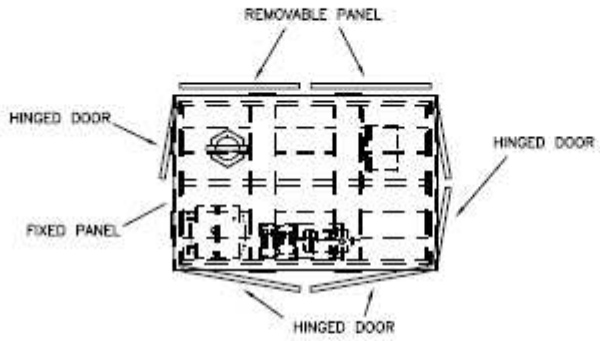

GENERAL CONSTRUCTION

FRAME – 50mm RHS FULLY WELDED CONSTRUCTION
FLOOR – 3mm HR4 STITCH WELDED TO MAIN FRAME
PRIOR TO FINISH BEING APPLIED
FORKLIFT POCKETS – 5mm HR4
PANELS – OUTER SKIN – 1.2mm GALV POWDER COATED
INNER SKIN – 0.7mm GALV NATURAL FINISH

FINISH

FRAME – POWDER COATED DARK GREY
PANELS – OUTER SHEET POWDER LIGHT GREY
INNER SHEET – SELF COLOUR GALVANISED STEEL

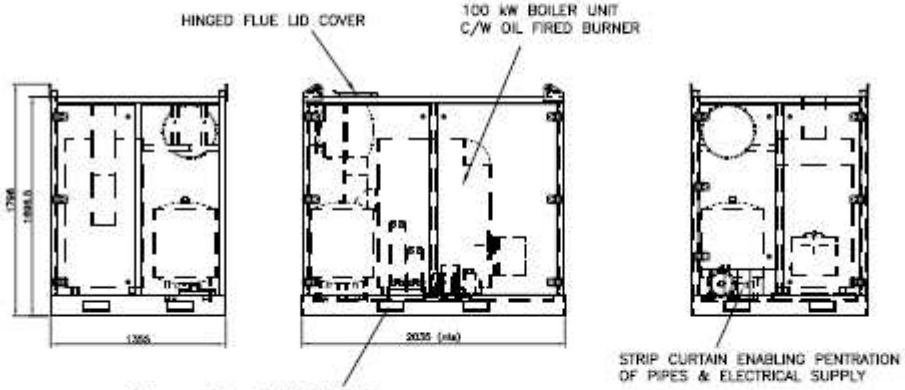

100 kW BOILER UNIT GENERAL ASSY		51-10-002	LINTON SERVICES LIMITED
		1	
		1:15	